

GEVA 75 1/8" Solenoid Valves

General Description

GEVA 75 1/8" solenoid valves are based on GEVA 75 operators mounted on a plastic base. These bases are available with or without flange, manual override as standard.

For AC / DC in a latch configuration, manual override will be supplied upon request.

Applications

They are specially designed for irrigation control systems.


Notes

- Available with brass adaptor upon request.
- For other available voltages and to order valves manufactured to your specific requirements, please contact our technical sales department.

How to Order

Example : G75-A-110302-1

Is a GEVA 75 with flange, 1/8" BSP 3WNC, no manual override, 1.2 orifice, 24V AC coil.

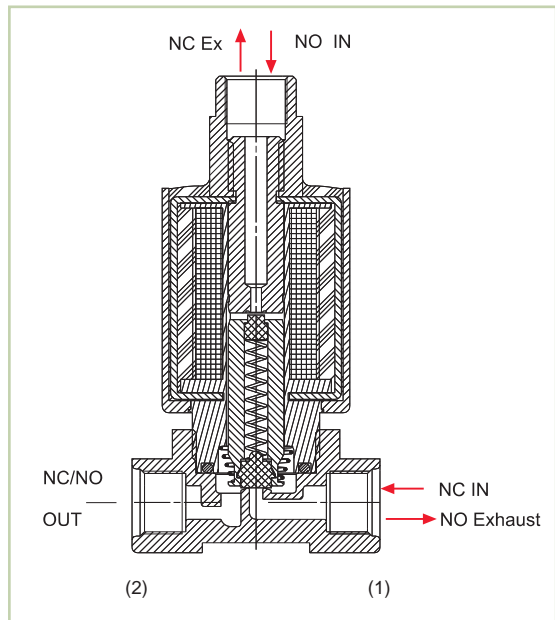

G75-A	Type	Port	Function	Manual Override ⁽¹⁾	Orifice	Voltage	Wires
	with flange 1	1/8" BSP 10	2WNC 1	None 0	1 1	24VAC 1	two null
	without flange 2	1/4" BSP ⁽²⁾ 20	3WNC 3	Plastic 1	1.2 2	12VAC 3	three a ⁽³⁾
	Brass 3	1/8" NPT 11	3WNO 4		1.6 3	12VDC 4	
		1/4" NPT ⁽²⁾ 21				24VDC 5	
						24Latch(23Ω) 6	
						110VAC ⁽⁴⁾ 7	
						6 Latch (4Ω) B	
						12 Latch (9Ω) C	
						16 Latch (12Ω) D	

(1) When ordering a latch valve, manual override is optional only in 2W valves

(2) Brass only

(3) For Latch only

(4) Only available in 2W - see dimensions details on page 5.2