


Technical Specifications

Voltage: 9 or 12 VDC
 Resistance: 4.2 Ω
 Capacitors: 4700µF for 9VDC, 2200µF for 12VDC
 Switching Time: 25-50 msec
 Electric connection: Lead wires 35cm, 18Awg (Black/Green)
 Lead wires : red, white, black - for 3 wires
 Protection: IP66
 Ambient Temp: Max 60° C
 Fluid Temp: Max 80° C

Materials

Housing: Reinforced Nylon 66
 Plunger and Pole: Passivated AISI430F
 Rubber Seat: EPDM
 Encapsulate: Polyurethane

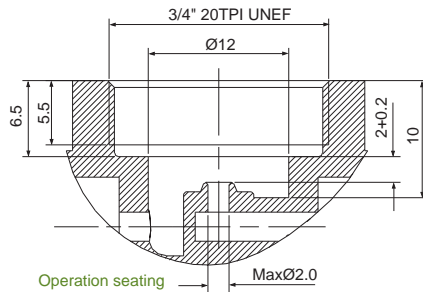

Working Pressure 2W NC

Orifice	up to 2.0
Pressure (bar)	12

Working Pressure 3W NC

Orifice	1.0	1.2	1.6
Pressure (bar)	16	11	6

Working Pressure 3W NO

Orifice	1.0	1.2	1.6
Pressure (bar)	16	12	8

Various Controllers Adaption Table

Controller Type	V	C[µF]	Ω
-	6	6800	4
Baccara	9	4700	4
Talgil	16	4700	12
Motorola	≥20	≥3300	23
Alextronix	12	4700	9
Q.T.	12	4700	9
Rainbird	12	4700	9
Miracle	12	4700	9
Galcon	12	4700	9
Other	Please consult		

Dimensions

